

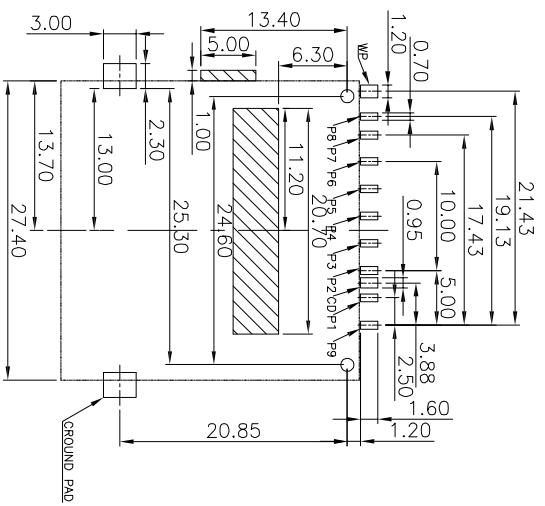
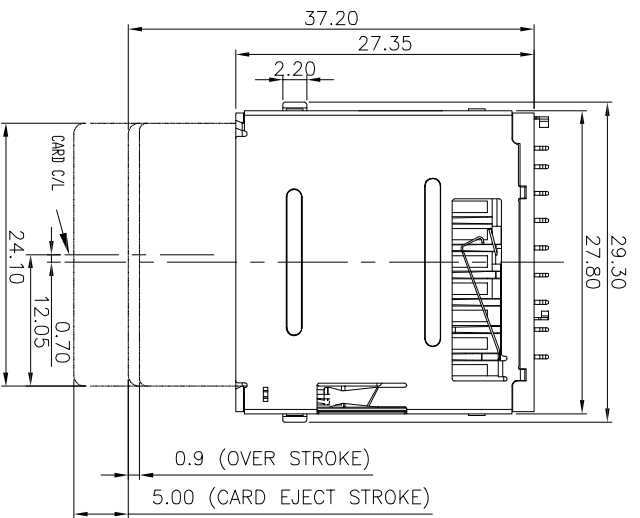



REV.	ECN NO.	MODIFY CONTENT	DATE
A	NEW		2011/10/31

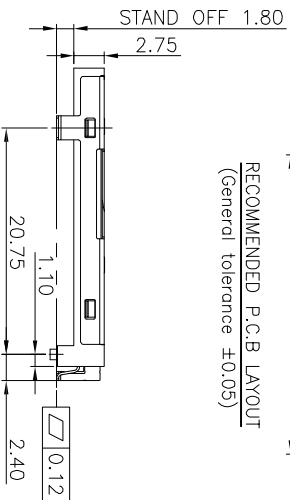

RECOMMENDED P.C.B LAYOUT  
(General tolerance ±0.05)

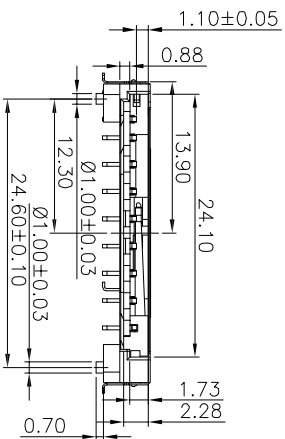

n	No.	NAME
1	CD/DAT3	
2	CMD	
3	Vss1	
4	VDD	
5	CLK	
6	Vss2	
7	DAT0	
8	DAT1	
9	DAT2	

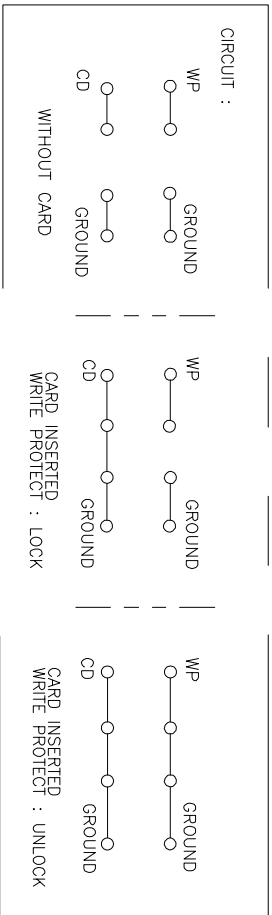

GENERAL TOLERANCE		DWG NO.	APPD.	WMD	Scale
X±0.45	x:±5'	JYSA0713-001			1:1
X±0.35	x:±2'	Title	CHKD:	UNIT	mm
XX±0.25	.xx:±1'	SD CARD 垫高1.8H	DR:		
XXX±0.15	.xxx:±0.5'	Part No.	Date		
SHEET	1/1	JYS-SD180-012	2011/10/31		



杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.

SPECIFICATION  
1.ELECTRICAL CHARACTERISTICS:  
CONTACT CURRENT RATING:0.5 AMPERES.  
DIELECTRIC WITHSTANDING VOLTAGE:AC500V/R.M.S.  
INSULATION RESISTANCE:1000MΩ MINIMUM.  
CONTACT RESISTANCE:40mΩ MAXIMUM.  
2.MECHANICAL CHARACTERISTICS:  
MATING CYCLE:5,000 INSERTIONS.  
INSERTION/EXTRACTION FORCE:0.70~1.20kgf  
3.ENVIRONMENTAL:  
OPERATING TEMPERATURE:-25℃~+85℃.  
4.MATERIAL:  
HOUSING:HI-TEMP PLASTIC LCP UL 94V-0 RATED  
CONTACT:COPPER ALLOY(T=0.20MM)  
SHELL:STAINLESS STEEL(T=0.15MM)  
SPRING:SWP